




DSD-12SSN20 DC SPUR GEAR MOTOR

典型应用/Typical applications :

自动快锁门、装订机、自动电视架、点钞机、聚光灯、卫生纸机、办公设备、家用电器、自动执行机构

Auto shutter, binding machine, automatic TV rack, money counter, spot light, tissue machine, office equipments, household appliances, automatic actuator

DRAWING (MM)

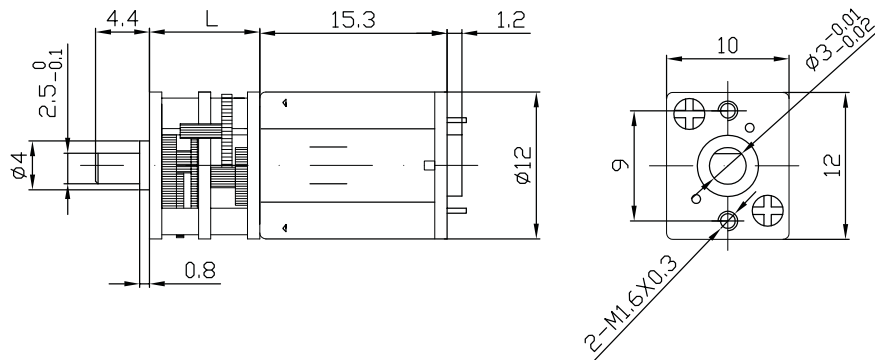

齿轮箱参数/ GEARBOX DATA:

级数 Reduction stage	2	3	4	5	7
减速比 Reduction ratio	10K	20K, 30K	50K, 63K, 100K	150K, 210K 250K, 298K	1000K
齿轮箱长度 Gearbox length "L" mm	9	9	9	9	12
齿轮箱效率 Gearbox efficiency	81%	73%	66%	59%	48%

电机参数/ MOTOR DATA:

电机型号 Motor model	额定电压 Rated voltage	空载/No load		负载/Load				堵转/Stall	
		电流	转速	电流	转速	扭矩	功率	扭矩	电流
		Current	Speed	Current	Speed	Torque	Output	Torque	Current
	V	mA	rpm	mA	rpm	gf. cm	W	gf. cm	mA
DSD-N2000316000	3	≤70	16000	≤210	13000	5	0.68	≥24	≥700
DSD-N2000610400	6	≤20	10400	≤40	8000	3	0.25	≥12	≥150
DSD-N2000615500	6	≤35	15500	≤80	12400	4	0.52	≥18	≥350

电机参数仅供参考, 请以实际样板为准。

The motor data are for reference only, real samples may be with different specifications.

齿轮箱电机输出扭矩: 电机输出扭矩 x 减速比 x 齿轮箱效率; 齿轮箱电机输出转速: 电机输出转速 / 减速比。

Output torque of gear motor : output torque of motor x reduction ratio x gearbox efficiency;

Output speed of gear motor: output speed of motor / reduction ratio.