DSD MOTOR

DSD-65SS3540 DC SPUR GEAR MOTOR

典型应用/Typical applications :
自动快锁门、装订机、自动电视架、点钞机、聚光灯、卫生纸机、办公设备、家用电器、自动执行机构
Auto shutter, binding machine, automatic TV rack , money counter, spot light, tissue machine , office equipments, household appliances, automatic actuator

DRAWING (MM)

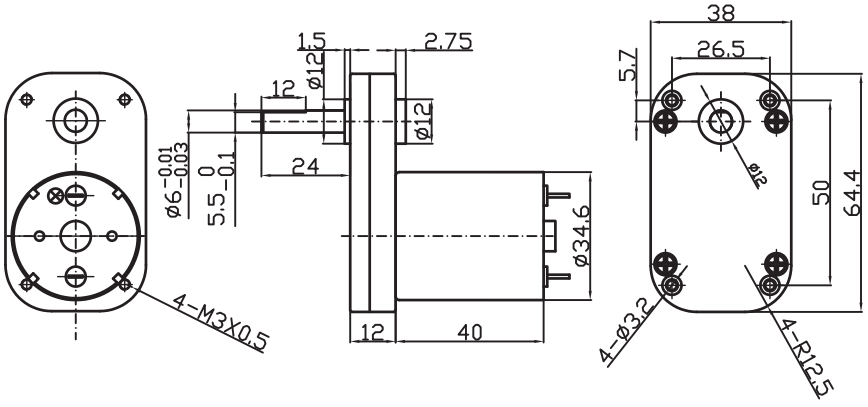

齿轮箱参数/GEARBOX DATA:

级数 Reduction stage	3	4	5
减速比 Reduction ratio	40.5K, 67.5K	135K, 225K	450K
齿轮箱长度 Gearbox length “L” mm	12	12	12
齿轮箱效率 Gearbox efficiency	73%	65%	59%

电机参数/MOTOR DATA:

电机型号 Motor model	额定电压 Rated voltage	空载/No load		负载/Load				堵转/Stall	
		电流 Current	转速 Speed	电流 Current	转速 Speed	扭矩 Torque	功率 Output	扭矩 Torque	电流 Current
	V	mA	rpm	mA	rpm	gf. cm	W	gf. cm	mA
DSD-35400124500	12	≤50	4500	≤420	3600	96	3.6	≥430	≥1790
DSD-35400126000	12	≤59	6000	≤513	5100	100	5.3	≥600	≥2180
DSD-35400244500	24	≤45	4500	≤215	3600	97	3.7	≥436	≥910
DSD-35400247000	24	≤38	7000	≤411	5100	115	6.1	≥380	≥1750

电机参数谨供参考,请以实际样板为准。
The motor data are for reference only, real samples may be with different specifications.
齿轮箱电机输出扭矩：电机输出扭矩 x 减速比 x 齿轮箱效率；齿轮箱电机输出转速：电机输出转速 / 减速比。
Output torque of gear motor : output torque of motor x reduction ratio x gearbox efficiency;
Output speed of gear motor: output speed of motor / reduction ratio.