




DSD-70SS3525 DC SPUR GEAR MOTOR

典型应用/Typical applications :

自动快锁门、装订机、自动电视架、点钞机、聚光灯、卫生纸机、办公设备、家用电器、自动执行机构

Auto shutter, binding machine, automatic TV rack, money counter, spot light, tissue machine, office equipments, household appliances, automatic actuator

DRAWING (MM)

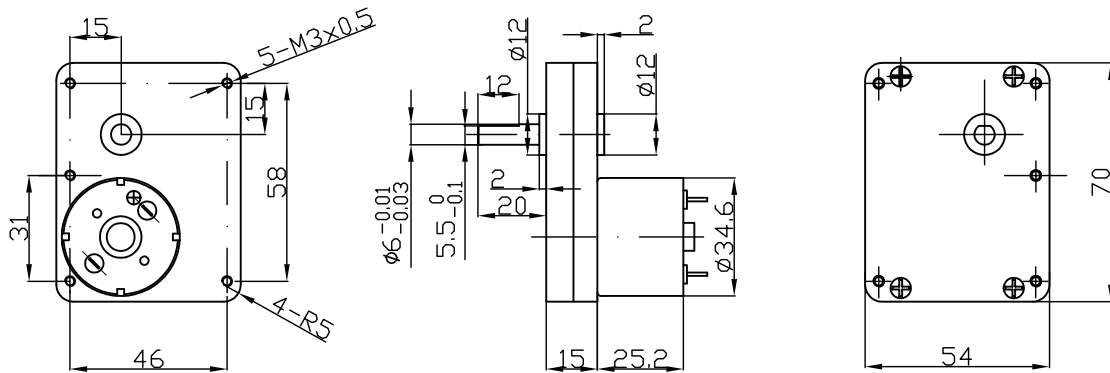

齿轮箱参数/ GEARBOX DATA:

级数 Reduction stage	3	4	5
减速比 Reduction ratio	54K, 73K	217K, 293K	564K, 763K
齿轮箱长度 Gearbox length "L" mm	15	15	15
齿轮箱效率 Gearbox efficiency	73%	65%	59%

电机参数/ MOTOR DATA:

电机型号 Motor model	额定电压 Rated voltage	空载/ No load		负载/ Load				堵转/ Stall	
		电流	转速	电流	转速	扭矩	功率	扭矩	电流
		Current	Speed	Current	Speed	Torque	Output	Torque	Current
	V	mA	rpm	mA	rpm	gf. cm	W	gf. cm	mA
DSD-35250126000	12	≤47	6000	≤269	4800	40	2.0	≥180	≥1140
DSD-352501211000	12	≤131	11000	≤755	8800	56	5.2	≥252	≥3210
DSD-35250243000	24	≤12	3000	≤38	2400	26	0.7	≥117	≥160
DSD-35250244500	24	≤15	4500	≤84	3600	38	1.4	≥171	≥360
DSD-35250246000	24	≤30	6000	≤111	4800	40	2.0	≥180	≥470

电机参数谨供参考, 请以实际样板为准。

The motor data are for reference only, real samples may be with different specifications.

齿轮箱电机输出扭矩: 电机输出扭矩 x 减速比 x 齿轮箱效率; 齿轮箱电机输出转速: 电机输出转速 / 减速比。

Output torque of gear motor: output torque of motor x reduction ratio x gearbox efficiency;

Output speed of gear motor: output speed of motor / reduction ratio.