




## DSD-65SS520 DC SPUR GEAR MOTOR

### 典型应用/Typical applications :

自动快锁门、装订机、自动电视架、点钞机、聚光灯、卫生纸机、办公设备、家用电器、自动执行机构

Auto shutter, binding machine, automatic TV rack , money counter, spot light, tissue machine , office equipments, household appliances, automatic actuator

### DRAWING (MM)

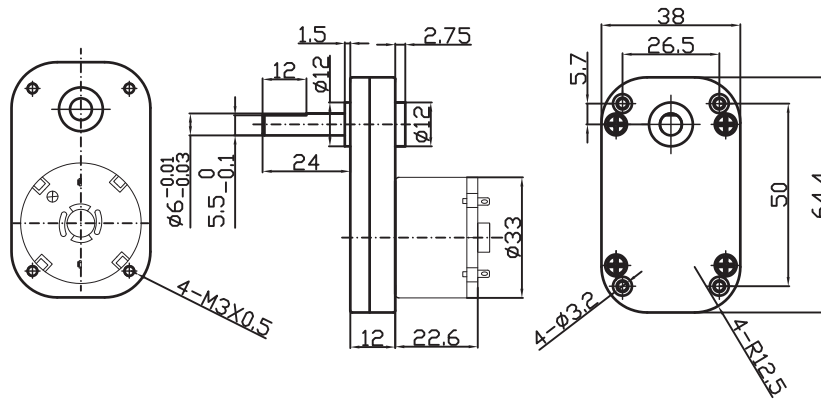

### 齿轮箱参数/ GEARBOX DATA:

级数 Reduction stage	3	4	5
减速比 Reduction ratio	40.5K, 67.5K	135K, 225K	450K
齿轮箱长度 Gearbox length "L" mm	12	12	12
齿轮箱效率 Gearbox efficiency	73%	65%	59%

### 电机参数/ MOTOR DATA:

电机型号 Motor model	额定电压 Rated voltage	空载/No load		负载/Load				堵转/Stall	
		电流	转速	电流	转速	扭矩	功率	扭矩	电流
		Current	Speed	Current	Speed	Torque	Output	Torque	Current
	V	mA	rpm	mA	rpm	gf. cm	W	gf. cm	mA
DSD-5200063000	6	≤27	3000	≤130	2600	15	0.41	≥100	≥630
DSD-5200123000	12	≤16	3000	≤70	2400	20	0.50	≥90	≥330
DSD-5200126000	12	≤54	6000	≤150	5500	15	0.86	≥162	≥1220
DSD-52001212000	12	≤40	12000	≤135	9600	45	4.50	≥202	≥3780
DSD-5200244500	24	≤25	4500	≤90	3400	33	1.40	≥122	≥350
DSD-5200246000	24	≤30	6000	≤200	4800	38	2.30	≥171	≥660
DSD-5200249000	24	≤54	9000	≤200	7200	47	3.50	≥211	≥1670

电机参数谨供参考, 请以实际样板为准。

The motor data are for reference only, real samples may be with different specifications.

齿轮箱电机输出扭矩: 电机输出扭矩 x 减速比 x 齿轮箱效率; 齿轮箱电机输出转速: 电机输出转速 / 减速比。

Output torque of gear motor: output torque of motor x reduction ratio x gearbox efficiency;

Output speed of gear motor: output speed of motor / reduction ratio.