




DSD-36RP555 DC PLANETARY GEAR MOTOR

典型应用/Typical applications :

自动快锁门、装订机、自动电视架、点钞机、聚光灯、卫生纸机、办公设备、家用电器、自动执行机构

Auto shutter, binding machine, automatic TV rack, money counter, spot light, tissue machine, office equipments, household appliances, automatic actuator

DRAWING (MM)

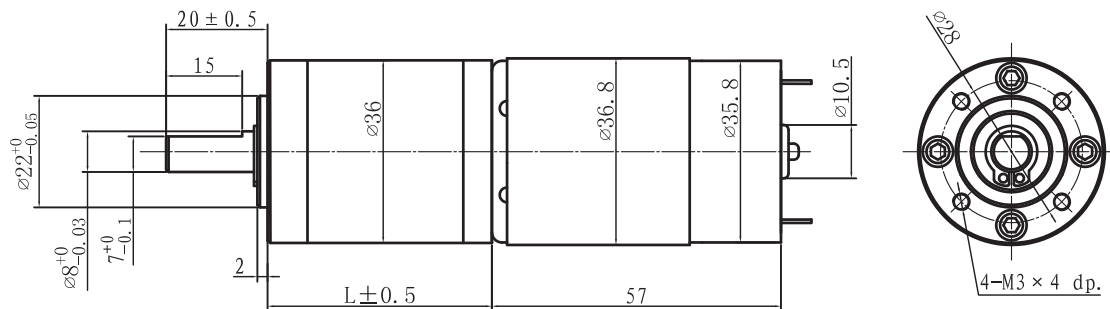

齿轮箱参数/GEARBOX DATA:

级数 Reduction stage	1	2	3	4	5
减速比 Reduction ratio	3.7K, 5.2K	14K, 19K, 27K	51K, 71K, 100K 139K	189K, 264K, 369K 515K, 721K	977K, 1367K, 1910K 2671K, 3736K
齿轮箱长度 Gearbox length "L" mm	26.5	34.5	42.5	50.5	58.5
齿轮箱效率 Gearbox efficiency	90%	81%	73%	65%	59%

电机参数/MOTOR DATA:

电机型号 Motor model	额定电压 Rated voltage	空载/No load		负载/Load				堵转/Stall	
		电流	转速	电流	转速	扭矩	功率	扭矩	电流
		Current	Speed	Current	Speed	Torque	Output	Torque	Current
	V	mA	rpm	mA	rpm	gf. cm	W	gf. cm	mA
DSD-5550066000	6	≤858	6000	≤2250	4500	300	13.8	≥1080	≥10000
DSD-5550123000	12	≤171	3000	≤561	2400	126	3.2	≥560	≥2390
DSD-5550126000	12	≤350	6000	≤2300	4500	280	13.0	≥1000	≥10230
DSD-5550128500	12	≤638	8500	≤2800	6450	300	20.3	≥1120	≥11900
DSD-5550243000	24	≤120	3000	≤336	2400	198	5.0	≥890	≥1430
DSD-5550244500	24	≤174	4500	≤620	3600	309	11.7	≥1390	≥3630
DSD-5550246000	24	≤270	6000	≤800	4500	280	13.0	≥1000	≥5820

电机参数谨供参考, 请以实际样板为准。

The motor data are for reference only, real samples may be with different specifications.

齿轮箱电机输出扭矩: 电机输出扭矩 x 减速比 x 齿轮箱效率; 齿轮箱电机输出转速: 电机输出转速 / 减速比。

Output torque of gear motor: output torque of motor x reduction ratio x gearbox efficiency;

Output speed of gear motor: output speed of motor / reduction ratio.